

312 NW Tenth Avenue
Suite 100
Portland, OR 97209
503.212.4612

May 25, 2022

Wendy Farley Campbell

SUBJECT: Microtel Land Use Comment Responses - Lighting

Wendy,

Please find responses to the Land Use Lighting Plans review comments, below.

1. Provide overall mounting height for D-Series fixtures (not just pole height), wall gooseneck fixtures, and wall wash fixtures, FCC 10-37-4C

The pole height for D-Series fixtures is 15'-0". The fixture head will be mounted to the pole via horizontal arm. The pole will be mounted to a poured-in-place concrete base, protruding approximately 6" above grade. The overall mounting height will be approximately 15'-6". Please refer to the attached concrete base detail and pole cutsheet: *Cast in Place Pole Base Detail.pdf*, *Type P1_Pole.pdf*.

Final mounting height of the wall gooseneck fixtures and wall wash fixtures is to be determined as design progresses. The mounting height will not exceed twenty feet in accordance with FCC 10-37-4C.

2. Cut sheets and photometric plan are missing the wall wash fixtures (North and West) and architectural gooseneck lighting (West and South)

Final selections of the indicated fixtures are to be determined. Fixtures primary use will be for highlighting exterior wall façade and will have minimal impact on parking lot photometric levels. Cut sheets can be provided for approval upon selection, prior to the completion of construction documents.

3. Specify which bollard top and crown will be installed.

Final selection is to be determined after coordination with Microtel brand. If fixture is revised, the final selection can be provided for design approval prior to the completion of construction documents.

Bollard shown on photometric is the proposed type to confirm fixture can meet the required illumination levels. Tentative selection is "BTS" and "BCF" bollard top and crown. Refer to the included cutsheet: *Type S4 – 3' Bollard Fixture.pdf*.


Sincerely,

Nate Boland
KCL Engineering, LLC

CONSULTING ENGINEERS

Mechanical
Electrical
Plumbing
Lighting
Technology

Attachment: Cast in Place Pole Base Detail.pdf

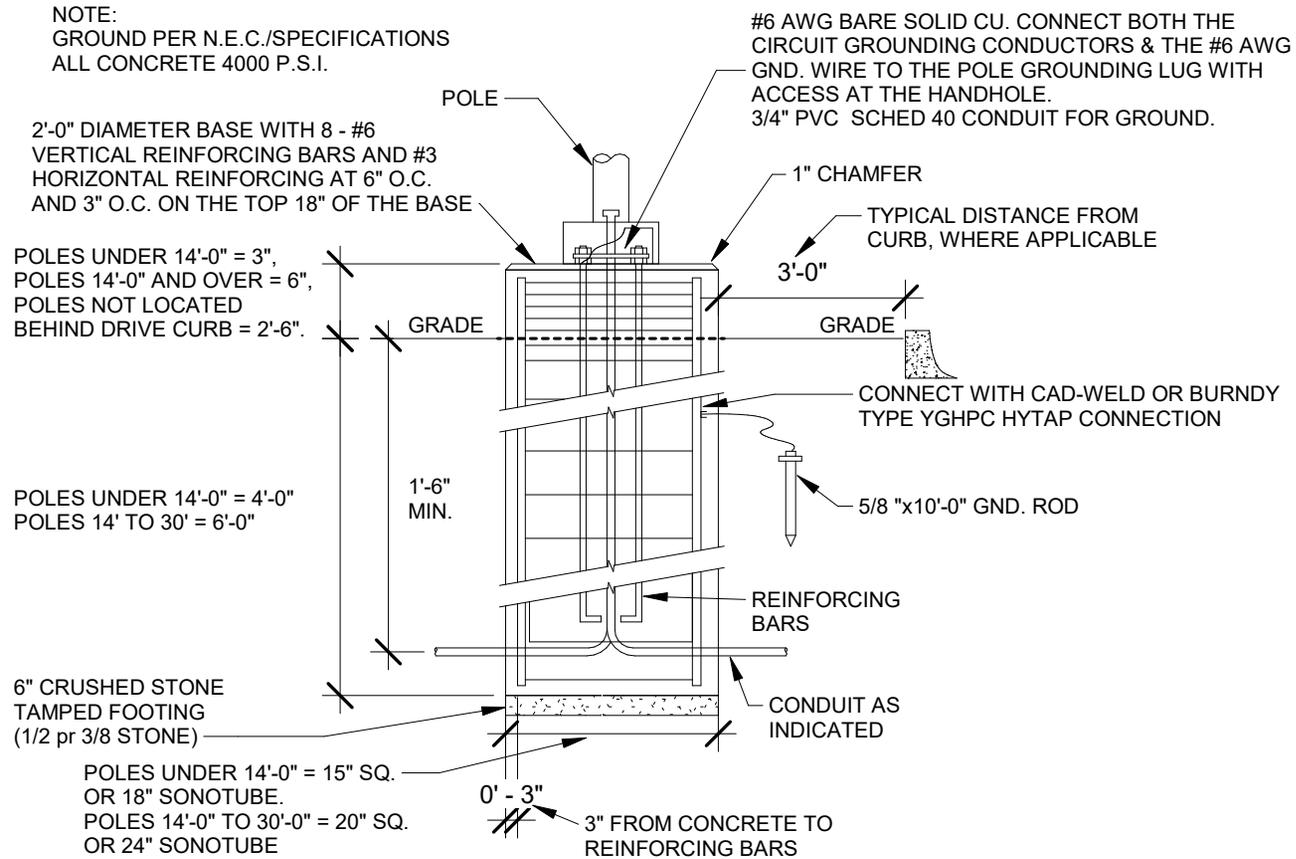



FEATURES & SPECIFICATIONS

INTENDED USE — These specifications are for USA standards only. Round Straight Steel is a general purpose light pole for up to 30-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

CONSTRUCTION

Pole Shaft: The pole shaft is of 0.120" uniform wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 42,000 psi. Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly round in cross-section down length of shaft with no taper. Standard shaft diameters are 3", 4", 4.5" and 5". 6" diameter shaft available by quote. Shaft wall thickness of .180" is available with certain tube diameters.

Pole Top: Options include tenon top, drilled for side mount fixture, tenon with drilling (includes extra handhole) and open top. Side drilled and open top poles include a removable press-fit, black, low density polyethylene top cap.

Handhole: A reinforced handhole with grounding provision is provided at 12" from the base end of the pole assembly on side A. Every handhole includes a cover and cover attachment hardware. 2.5" x 5" rectangular handhole is provided on pole.

Base Cover: A two-piece ABS round plastic full base cover is provided with each pole assembly. Additional base cover options are available upon factory request. Options include fabricated two-piece sheet steel or heavy duty two-piece cast aluminum full base cover. All base covers are finished to match pole.

Anchor Base/Bolts: Anchor base is fabricated from hot-rolled carbon steel plate that conforms with ASTM A36. Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" blend on one end. All anchor bolts are hot-dipped galvanized a minimum of 12" nominal on the threaded end. Anchor bolts are made of steel rod having a minimum yield strength of 55,000 psi and a yield strength of 75,000 psi to 95,000 psi.

HARDWARE — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

FINISH — Extra durable standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

BUY AMERICAN — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number
Notes
Type



Anchor Base Poles

RSS

ROUND STRAIGHT STEEL



RSS Round Straight Steel Pole

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: RSS 20 4-5B DM19 DDB

RSS	Nominal fixture mounting height	Nominal shaft base size/wall thickness ¹	Mounting ²	Options	Finish ¹³
RSS	8'-30" (for 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.) (See technical information table for complete ordering information.)	3B 3" (.120") 4B 4" (.120") 4-5B 4 1/2" (.120") 5B 5" (.120") (See technical information table for complete ordering information.)	<u>Tenon mounting</u> PT Open top T20 2-3/8" O.D. (2" NPS) T25 2-7/8" O.D. (2-1/2" NPS) T30 3-1/2" O.D. (3" NPS) ² T35 4" O.D. (3-1/2" NPS) ² <u>KAC/KAD/KSE/KSF/KVR/KVF Drill mounting³</u> DM19 1 at 90° DM28 2 at 180° DM28PL 2 at 180° with one side plugged DM29 2 at 90° DM32 3 at 120° DM49 4 at 90° <u>CSX/DSX/RSX/AERIS™/OMERO™/HLA/KAX Drill mounting²</u> DM19AS 1 at 90° DM28AS 2 at 180° DM29AS 2 at 90° DM32AS 3 at 120° DM39AS 3 at 90° DM49AS 4 at 90° <u>RAD drill mounting^{3,4}</u> DM19RAD 1 at 90° DM28RAD 2 at 180° DM29RAD 2 at 90° DM32RAD 3 at 120° DM39RAD 3 at 90° DM49RAD 4 at 90° <u>ESX Drill mounting³</u> DM19ESX 1 at 90° DM28ESX 2 at 180° DM29ESX 2 at 90° DM39ESX 3 at 90° DM49ESX 4 at 90° <u>AERIS™ Suspend drill mounting^{3,5}</u> DM19AST_ 1 at 90° DM28AST_ 2 at 180° DM29AST_ 2 at 90° DM39AST_ 3 at 90° DM49AST_ 4 at 90° <u>OMERO™ Suspend drill mounting^{3,5}</u> DM19AST_ 1 at 90° DM28AST_ 2 at 180° DM29AST_ 2 at 90° DM39AST_ 3 at 90° DM49AST_ 4 at 90°	<u>Shipped installed</u> L/AB Less anchor bolts (Include when anchor bolts are not needed) L/FBC Less full base cover (include to order pole without a base cover) VD Vibration damper ⁶ TP Tamper resistant handhole cover fasteners HAxy Horizontal arm bracket (1 fixture) ^{7,8} FDLxy Festoon outlet less electrical ^{7,9} CPL12/xy 1/2" coupling ⁷ CPL34/xy 3/4" coupling ⁷ CPL1/xy 1" coupling ⁷ NPL12/xy 1/2" threaded nipple ⁷ NPL34/xy 3/4" threaded nipple ⁷ NPL1/xy 1" threaded nipple ⁷ EHHxy Extra handhole ^{7,10} BAA Buy America(n) Act Compliant ¹¹ IC Interior coating ¹² UL UL listed with label (Includes NEC compliant cover) NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled) <u>Shipped separately</u> (blank) FBC Full base cover (plastic) (blank) TC Top cap (blank) HHC Handhole cover	<u>Super Durable</u> DDBXD Dark bronze DWHXD White DBLXD Black DMBXD Medium bronze DNAXD Natural aluminum GALV Galvanized finish <u>Classic colors</u> DSS Sandstone DGC Charcoal gray DTG Tennis green DBR Bright red DSB Steel blue <u>Architectural colors (powder finish)</u> Galvanized, Paint over Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes available.

NOTES:



- Wall thickness will be signified with a "B" (11 Gauge) or a "F" (7-Gauge) in nomenclature. "B" -.120" | "F" -.180"
- PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, follow this example: DM28/T20. The combination includes a required extra handhole.
- Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.
- DM19RAD, DM28RAD and DM32RAD require a minimum top O.D. of 4". DM29RAD, DM39RAD and DM49RAD require a minimum top O.D. of 4.25".
- Insert "1" or "2" to designate fixture size; e.g. DM19AST2.
- VD not available with 3" pole. On 4" and 5" poles, VD cannot be installed if provisions (EHH, FDL, NPL, CPL) are located higher than 2/3 of the pole's total height. *Example: Pole height is 25ft, A provision cannot be placed above 16ft.*
- Specify location and orientation when ordering option.
For "x": Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".
Example: 5ft = 5 and 20ft 3in = 20-3
For "y": Specify orientation from handhole (A,B,C,D) Refer to the Handhole Orientation diagram below.
Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C
- Horizontal arm is 18" x 2-3/8" O.D. tenon standard with radius curve providing 12' rise. If ordering two horizontal arm at the same height, specify with HAxyy. *Example: HA20BD*
- FDL does not come with additional covering.
- Combination of tenon-top and drill mount includes extra handhole.
- Use when mill certifications are required.
- Provides enhanced corrosion resistance.
- Finish must be specified. Additional colors available; see Architectural Colors brochure linked [here](#) (Form No. 794.3)

RSS Round Straight Steel Pole

TECHNICAL INFORMATION — EPA (ft ²) with 1.3 gust											
Catalog number	Nominal shaft length (ft)*	Pole shaft size (in x ft)	Wall thickness (in)	80 mph	Max weight	90 mph	Max weight	100 mph	Max weight	Bolt size (in. x in. x in.)	Approximate ship weight (lbs.)
RSS 8 4-5B	8	4.5 x 8.0	0.120	24.7	630	19.7	495	16.0	430	3/4 x 18 x 3	55
RSS 10 3B	10	3.0 x 10.0	0.120	10.0	250	7.7	190	6.0	175	3/4 x 18 x 3	55
RSS 10 4B	10	4.0 x 10.0	0.120	19.1	480	15	375	12.2	305	3/4 x 18 x 3	70
RSS 10 4-5B	10	4.5 x 10.0	0.120	24.5	615	19.5	490	15.8	395	3/4 x 18 x 3	75
RSS 12 3B	12	3.0 x 12.0	0.120	7.7	195	5.8	145	4.4	130	3/4 x 18 x 3	60
RSS 12 4B	12	4.0 x 12.0	0.120	15.0	390	11.8	300	9.5	240	3/4 x 18 x 3	80
RSS 12 4-5B	12	4.5 x 12.0	0.120	19.8	495	15.7	395	12.7	320	3/4 x 18 x 3	85
RSS 14 3B	14	3.0 x 14.0	0.120	6.0	175	4.4	130	3.3	90	3/4 x 18 x 3	70
RSS 14 4B	14	4.0 x 14.0	0.120	12.2	305	9.4	250	7.6	195	3/4 x 18 x 3	90
RSS 14 4-5B	14	4.5 x 14.0	0.120	16.2	405	12.8	320	10.3	260	3/4 x 18 x 3	95
RSS 15 4-5B	15	4.5 x 15.0	0.120	12.0	300	9.5	250	7.5	200	3/4 x 18 x 3	96
RSS 16 3B	16	3.0 x 16.0	0.120	4.6	125	3.2	100	2.3	60	3/4 x 18 x 3	80
RSS 16 4B	16	4.0 x 16.0	0.120	9.6	250	7.4	185	5.9	150	3/4 x 18 x 3	100
RSS 16 4-5B	16	4.5 x 16.0	0.120	13.1	330	10.2	265	8.2	205	3/4 x 18 x 3	105
RSS 18 3B	18	3.0 x 18.0	0.120	3.4	90	2.3	60	1.4	70	3/4 x 18 x 3	90
RSS 18 4B	18	4.0 x 18.0	0.120	7.6	190	5.7	180	4.5	130	3/4 x 18 x 3	110
RSS 18 4-5B	18	4.5 x 18.0	0.120	10.5	265	8.2	210	6.5	165	3/4 x 18 x 3	115
RSS 20 3B	20	3.0 x 20.0	0.120	2.4	100	1.4	75	--	--	3/4 x 18 x 3	100
RSS 20 4B	20	4.0 x 20.0	0.120	6.0	150	4.45	150	3.45	125	3/4 x 18 x 3	120
RSS 20 4-5B	20	4.5 x 20.0	0.120	8.5	215	6.6	165	5.2	130	3/4 x 18 x 3	130
RSS 20 5B	20	5.0 x 20.0	0.120	11.75	300	9.1	230	7.25	180	3/4 x 18 x 3	145
RSS 22 4-5B	22	4.5 x 22.0	0.120	6.0	150	4.5	125	3.75	100	3/4 x 18 x 3	134
RSS 25 4B	25	4.0 x 25.0	0.120	2.85	100	1.95	75	1.35	75	3/4 x 18 x 3	145
RSS 25 4-5B	25	4.5 x 25.0	0.120	4.8	130	3.6	90	2.7	90	3/4 x 18 x 3	145
RSS 25 5B	25	5.0 x 25.0	0.120	7.25	180	5.5	150	4.25	150	3/4 x 18 x 3	180
RSS 30 4-5B	30	4.5 x 30.0	0.120	2.3	80	1.5	75	1.0	60	3/4 x 18 x 3	185
RSS 30 5B	30	5.0 x 30.0	0.120	4.2	150	3	125	2.25	100	3/4 x 18 x 3	210


NOTE: EPA values are based ASCE 7-93 wind map. For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.

BASE DETAIL

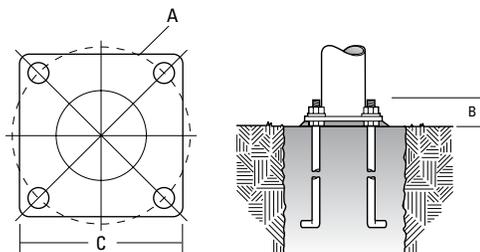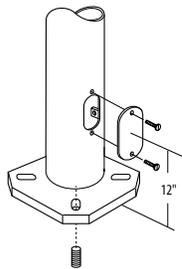

POLE DATA					
Shaft base size	Bolt circle A	Bolt projection B	Base square C	Template description	Anchor bolt description
3"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0
4"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0
4.5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0
5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0

HANDHOLE ORIENTATION









IMPORTANT INSTALLATION NOTES:

- Do not erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use factory template.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.



RADEAN Bollard

LED Site Luminaire

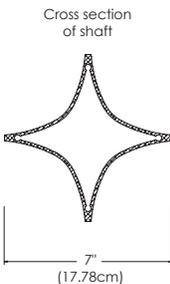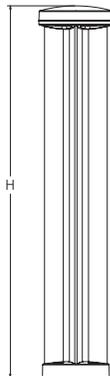

Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

Diameter: D = 8.25" (20.96cm)
Height: H = 41.5" Standard (105.41cm)
Weight (max): 20lbs (9.07Kg)

Introduction

The Radean LED Bollard is an award-winning, energy-saving, long-life solution designed to perform the way a bollard should.

The Radean LED Bollard's rugged construction, durable finish and long-lasting LEDs will provide years of maintenance-free service.

Ordering Information

EXAMPLE: RADB LED P4 30K SYM MVOLT BTS BCCDNATXD DBLXD

Series	Performance Package	Color temperature	Distribution	Voltage	Control options	Bollard top (required)
RADB LED	P1 P2 P3 P4 P5 ¹	27K 2700 K 30K 3000 K 35K 3500 K 40K 4000 K 50K 5000 K	ASY Asymmetric ² SYM Symmetric ¹	MVOLT ³ 120 208 ³ 240 ³ 277 347 480	Shipped installed PE Photoelectric cell, button type ^{4,5} DMG 0-10V dimming driver (no controls) E7WH Emergency battery backup, Certified in CA Title 20 MAEDBS ^{1,6,7} FAO Field adjustable output ⁵ PIR Motion sensor Bi-level ^{3,5,6,7}	Slim Top BTS Slim top, painted to match shaft ^{5,8} BTSDWHXD Slim top, white ^{5,8} BTSDBLXD Slim top, black texture ^{5,8} BTSDDBTXD Slim top, dark bronze textured ^{5,8} BTSDDBXD Slim top, dark bronze ^{5,8} BTSDNATXD Slim top, natural aluminum textured ^{5,8} BTSDNAXD Slim top, natural aluminum ^{5,8} BTSDWHGXD Slim top, white textured ⁸ Tall Top BTT Tall top painted to match shaft ⁸ BTDBLXD Tall top, black textured ⁸ BTDBLXD Tall top, black ⁸ BTDDBTXD Tall top, dark bronze textured ⁸ BTDDDBXD Tall top, dark bronze ⁸ BTDDNATXD Tall top, natural aluminum textured ⁸ BTDDNAXD Tall top, natural aluminum BTDDWHGXD Tall top, white textured ⁸ BTDDWHXD Tall top, white ⁸

Bollard crown (required)	Other options	Finish (required)
Deep Crown BCC Deep crown, painted to match shaft ⁸ BCCDWHXD Deep crown, white ⁸ BCCDBLXD Deep crown, black ⁸ BCCDBLXD Deep crown, black textured ⁸ BCCDDBTXD Deep crown, dark bronze textured ⁸ BCCDDBXD Deep crown, dark bronze ⁸ BCCDNATXD Deep crown, natural aluminum textured ⁸ BCCDNAXD Deep crown, natural aluminum ⁸ BCCDWHGXD Deep crown, white textured ⁸	Flat Crown BCF Flat crown, painted to match shaft ⁸ BCFDBLXD Flat crown, black textured ⁸ BCFDBLXD Flat crown, black ⁸ BCFDDBTXD Flat crown, dark bronze textured ⁸ BCFDDBXD Flat crown, dark bronze ⁸ BCFDNATXD Flat crown, natural aluminum textured ⁸ BCFDNAXD Flat crown, natural aluminum ⁸ BCFDWHGXD Flat crown, white textured ⁸ BCFDWHXD Flat crown, white ⁸	H24 ^{6,9} 24" overall height H30 ^{6,9} 30" overall height H36 ^{6,9} 36" overall height L/AB Without anchor bolts DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white

Accessories

Ordered and shipped separately.

RADBAB U	Anchor bolts (4)	RK1RADB BCKIT (FINISH) U	Base cover with bolt caps
RADBABC DDBXD U	Replacement anchor bolt covers (specify finish) (4)	RK1RADB EMTESTMAG U	Emergency test stylus

NOTES

- P5 only available in SYM distribution.
- ASY has only two illuminated quadrants driven at higher drive currents to generate similar output as the SYM-4-quadrant product.
- PIR not available with 208V or 240V.
- PE only available with ASY.
- PE, PIR and FAO not available with BTS.


- E7WH and PIR only available in full height. Not available with H24, H30 or H36.
- PIR not available with E7WH.
- Architectural and custom colors available (additional leadtimes and cost may apply).
- 42" Height is standard. H24, H30 and H36 have longer leadtimes.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
 © 2012-2021 Acuity Brands Lighting, Inc. All rights reserved.

Options

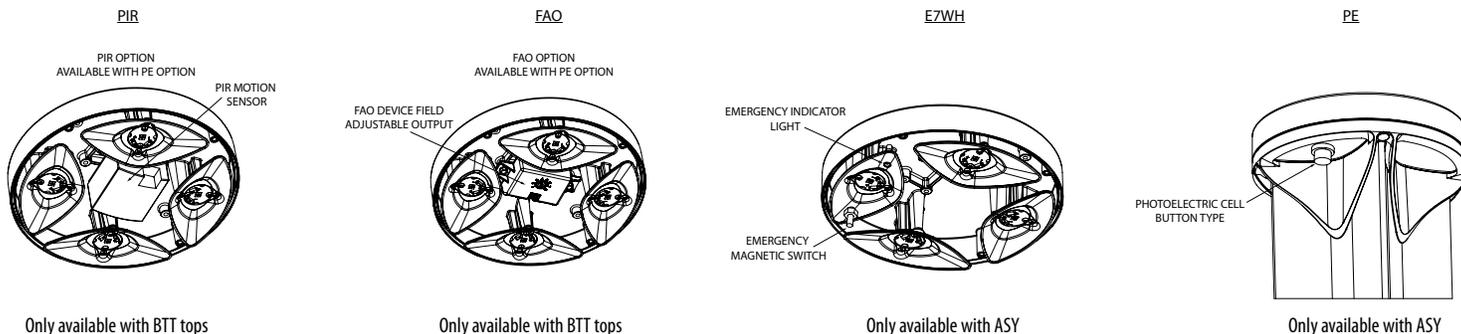

Performance Data

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%.

Performance Data DNAXD Finish*

Light Engines	Performance Package	System Watts	2700K					3000K					3500K					4000K					5000K				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
"Symmetric (4 light engines)"	P1	5	345	0	1	0	66	362	0	1	0	69	370	0	1	0	71	380	0	1	0	73	382	0	1	0	73
	P2	8	644	0	1	0	81	677	0	1	0	85	692	0	1	0	87	711	0	1	0	89	713	0	1	0	89
	P3	13	1036	1	1	0	77	1088	1	1	0	81	1112	1	1	0	83	1142	1	1	0	85	1146	1	1	0	85
	P4	19	1460	1	1	0	79	1534	1	1	0	83	1568	1	1	0	84	1610	1	1	0	87	1616	1	1	0	87
	P5	32	2314	1	1	0	72	2430	1	1	0	75	2484	1	1	0	77	2551	1	1	0	79	2561	1	1	0	79
"Asymmetric (2 light engines)"	P1	5	312	0	1	0	60	328	0	1	0	63	335	0	1	0	64	344	0	1	0	66	346	0	1	0	66
	P2	8	584	0	1	0	73	613	0	1	0	77	627	0	1	0	78	644	0	1	0	81	646	0	1	0	81
	P3	13	938	0	1	0	70	985	0	1	0	73	1007	0	1	0	75	1035	0	1	0	77	1038	0	1	0	77
	P4	19	1323	0	1	0	71	1390	0	1	0	75	1420	0	1	0	76	1459	0	1	0	78	1464	0	1	0	79

*Note: Lumen output varies based on finish. Silver color shown, for black (worst) or white (best) photometry, see specific photometric files downloadable from www.acuitybrands.com

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

	Projected LED Lumen Maintenance			
	25,000	50,000	75,000	100,000
P1	0.94	0.89	0.85	0.80
P2	0.94	0.89	0.85	0.80
P3	0.94	0.89	0.85	0.80
P4	0.94	0.89	0.85	0.80
P5	0.94	0.89	0.85	0.80

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average temperatures from 0-40°C (32-104°F).


Ambient	LAT Factor	
0	32°F	1.03
5	41°F	1.03
10	50°F	1.02
15	59°F	1.01
20	68°F	1.01
25	77°F	1
30	86°F	0.99
35	95°F	0.99
40	104°F	0.98

Electrical Load

	Current (Amp)						Current (Amp)			
	Watts @120V (W)	Watts @277V (W)	@120V (A)	@208V (A)	@240V (A)	@277V (A)	Watts (@347V)	Watts (@480V)	@347V (A)	@480V (A)
P1 ASY	5	6	0.0445	0.0299	0.0276	0.0262	10	10	0.0443	0.0319
P2 ASY	9	10	0.0751	0.0471	0.0429	0.0399	14	14	0.0505	0.0364
P3 ASY	14	15	0.1147	0.0699	0.0627	0.0571	18	18	0.0611	0.0441
P4 ASY	19	19	0.1586	0.0928	0.0819	0.0735	23	23	0.0709	0.0513
P1 SYM	5	6	0.0444	0.0301	0.0279	0.0265	9	9	0.0441	0.0319
P2 SYM	9	10	0.0734	0.0461	0.0421	0.0391	13	13	0.0502	0.0363
P3 SYM	13	14	0.112	0.067	0.0598	0.0544	18	18	0.0602	0.0435
P4 SYM	18	19	0.1535	0.0902	0.0796	0.0713	22	22	0.0691	0.0499
P5 SYM	31	31	0.2597	0.1527	0.1326	0.1149	35	36	0.1079	0.079



Isofootcandle plots for the RADB. Distances are in units of mounting height (3.5').

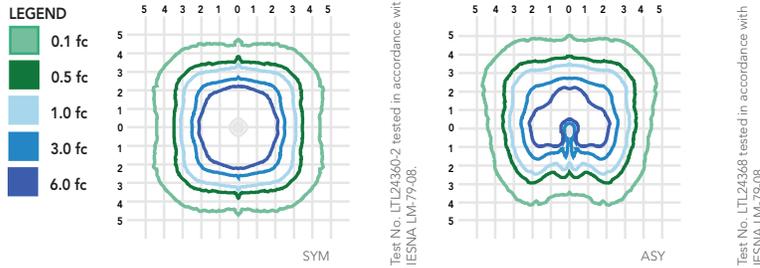

FEATURES & SPECIFICATIONS

INTENDED USE

The rugged construction and maintenance-free performance of the Radean LED Bollard is ideal for illuminating building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

CONSTRUCTION

One-piece extruded aluminum shaft with thick side walls for extreme durability, and die-cast reflector and top cap. Four 3/8" x 7" anchor bolts with double nuts and washers and 5-2/3" max. bolt circle template ensure stability. Overall height is 42" standard.

FINISH

Exterior parts are protected by a zinc-infused super durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering for maximum retention of gloss and luster. A tightly controlled multi-stage process ensures a minimum 3-mil thickness for a finish that can withstand the elements without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Two optical distributions are available: symmetrical and asymmetrical. IP66 sealed LED light engine provides smoothly graduated illumination. Light engines are available in 2700K, 3000K, 3500K, 4000K or 5000K.

ELECTRICAL

Light engines consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (L80/100,000 hours at P5 at 25°C). Class 2 electronic drivers are designed for an expected life of 100,000 hours with < 1% failure rate. Electrical components are mounted on a removable power tray.

LISTINGS

CSA certified to U.S. and Canadian standards. Light engines are IP66 rated. Rated for -40°C minimum ambient. Emergency battery backup rated for -10°C minimum ambient. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color or less.

BUY AMERICAN

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FARS, DFARS and DOT. Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY

Five-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application and color. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.